arXiv:1410.5903v1 [math.CO] 22 Oct 2014

A 3-to-1 cactus graph: Details

Avi Levy

October 23, 2014

Abstract

We briefly present a new construction of a 3-to-1 unrecoverable electrical network. See [CIM], [French] and [Klumb] for more background, and see [BSG] for a related construction. This is a taste of a comprehensive forthcoming paper on unrecoverable electrical networks.

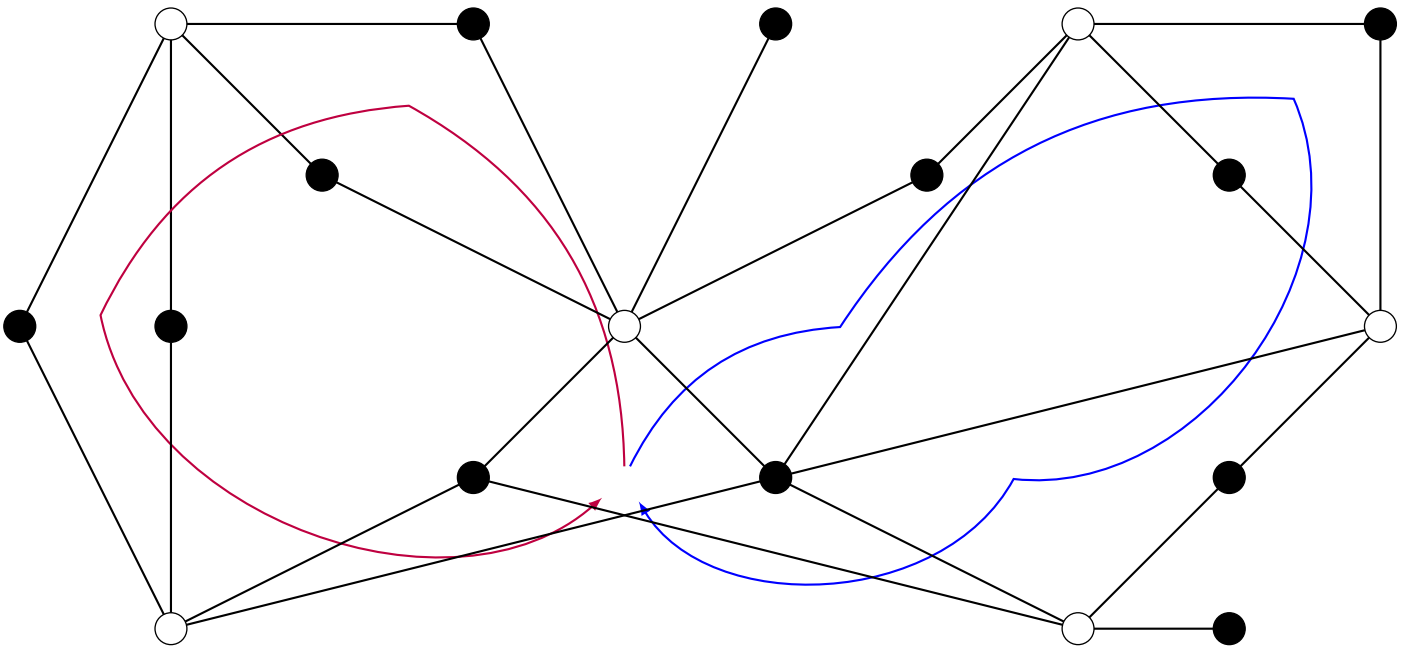

Figure 1: Overview of a two leaf cactus: • = boundary vertex, ◦ = interior vertex.

The overview emphasizes the underlying loop structure. The left loop consists of quad^3, and the right consists of switch quad^2 switch. Note that the overview omits some "non-structural" auxiliary edges which we introduce on the next page.

Notice that the loops emanate from the central 6-star, which is actually a (quad # switch). We also refer to it as a **multiplexor**, following [Klumb].

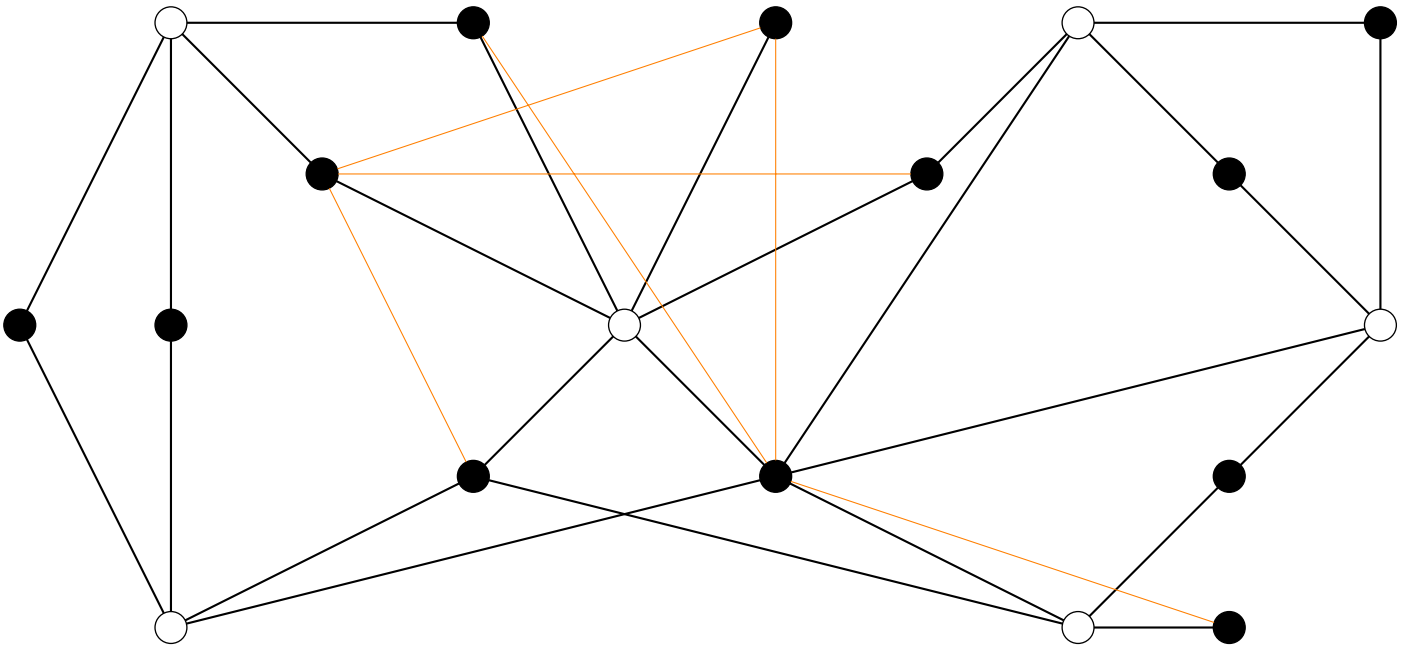

Figure 2: Auxiliary edges which prevent recoverability

Here $\kappa(G)$ denotes the arity of G (cardinality of largest fiber).

Claim 0.1 (Upper bound). $\kappa(G) \leq 3$

Proof. Let x denote the sum of the conductivities entering $v_{13}v_{14}$ (see Figure 10). That is, x is the sum of the red and blue arrow heads.

Suppose x is known. By the claim following Figure 6, all edges in the multiplexor are determined. Propagation along the red and blue loops determines the remaining edges. Hence

$$\kappa(G) \leq \#\text{ of choices for } x.$$

Since there are 2 loops, x satisfies a cubic and thus the graph is at most 3-to-1. □

Claim 0.2 (Lower bound). $\kappa(G) \geq 3$

Proof. We construct three networks on G with the same response. The networks correspond to $x = 2, 3, 4$. See tables on next page and subsequent diagrams for the rest of the construction. □

$x \longrightarrow 7-x$	$\longrightarrow \frac{1}{7-x}$	$\longrightarrow 2-\frac{1}{7-x}$	$\longrightarrow \frac{6}{2-\frac{1}{7-x}}$	$\longrightarrow 4-\frac{6}{2-\frac{1}{7-x}}$	$\longrightarrow \frac{1}{4-\frac{6}{2-\frac{1}{7-x}}}$	$(=1-\frac{3/2}{x-5})$
2 5	$\frac{1}{5}$	$\frac{9}{5}$	$\frac{10}{3}$	$\frac{2}{3}$	$\frac{3}{2}$	
3 4	$\frac{1}{4}$	$\frac{7}{4}$	$\frac{24}{7}$	$\frac{4}{7}$	$\frac{7}{4}$	
4 3	$\frac{1}{3}$	$\frac{5}{3}$	$\frac{18}{5}$	$\frac{2}{5}$	$\frac{5}{2}$	

Figure 3: Arm propagation for left loop (quad^3)

$x \longrightarrow 7-x$	$\longrightarrow 7-x$	$\longrightarrow x$	$\longrightarrow \frac{1}{x}$	$\longrightarrow 1-\frac{1}{x}$	$\longrightarrow \frac{3/2}{1-\frac{1}{x}}$	$\longrightarrow \frac{7}{2}-\frac{3/2}{1-\frac{1}{x}}$	$\longrightarrow \frac{7}{2}-\frac{3/2}{1-\frac{1}{x}}$	$(=2-\frac{3/2}{x-1})$
2 5	5	2	$\frac{1}{2}$	$\frac{1}{2}$	3	$\frac{1}{2}$	$\frac{1}{2}$	
3 4	4	3	$\frac{1}{3}$	$\frac{2}{3}$	$\frac{9}{4}$	$\frac{5}{4}$	$\frac{5}{4}$	
4 3	3	4	$\frac{1}{4}$	$\frac{3}{4}$	2	$\frac{3}{2}$	$\frac{3}{2}$	

Figure 4: Arm propagation for right loop (switch quad^2 switch)

Observe that all three assignments are valid due to "loop conservation":

$$\begin{bmatrix} \frac{3}{2} \\ \frac{7}{4} \\ \frac{5}{2} \end{bmatrix} + \begin{bmatrix} \frac{1}{2} \\ \frac{5}{4} \\ \frac{3}{2} \end{bmatrix} = \begin{bmatrix} 2 \\ 3 \\ 4 \end{bmatrix}$$

In a sense the construction is complete, for we have found a valid loop assignment. However, it is instructive to illustrate the process of populating a graph given a loop assignment. Our present graph can be decomposed into quads, switches, and a (quad # switch), so it suffices to populate these three subgraphs. In the following diagrams, the expressions in the central interior node is a multiplier, to be applied to the surrounding edge weights.

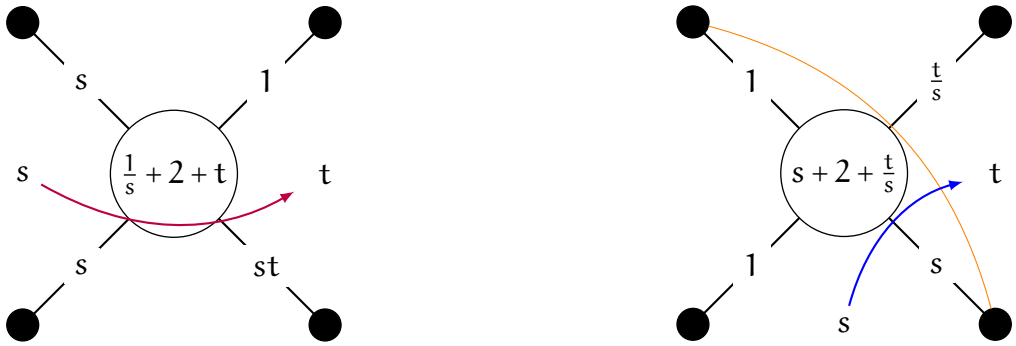

Figure 5: Populating a quad and switch, respectively.

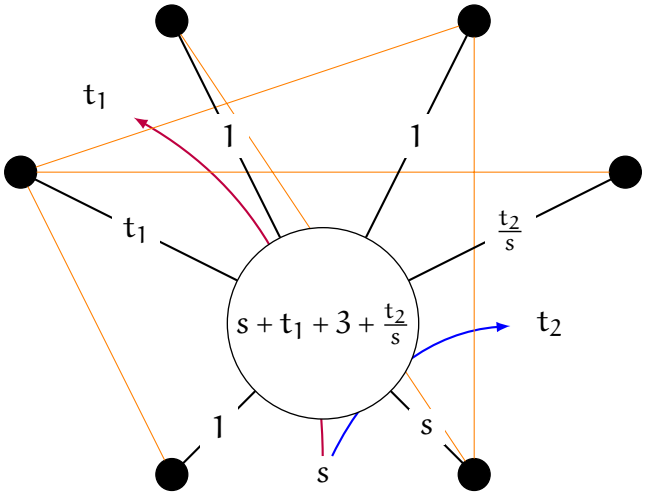

Figure 6: Populating a (quad # switch)

Claim 0.3. *The edge entering a (quad # switch) determines all edges.*

Proof. Play the following game: an orange edge is removed if its endpoints can be connected with white edges. Observe that all orange edges are removed. □

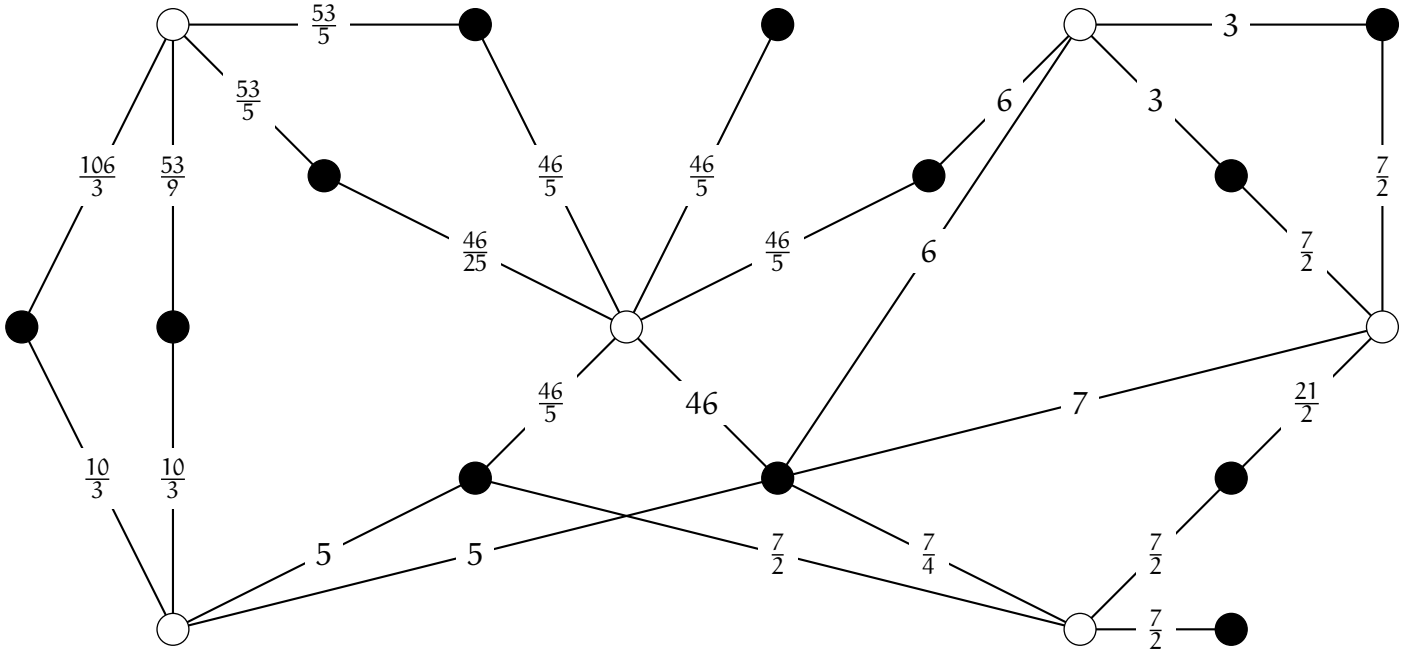

Figure 7: Populated with x = 2

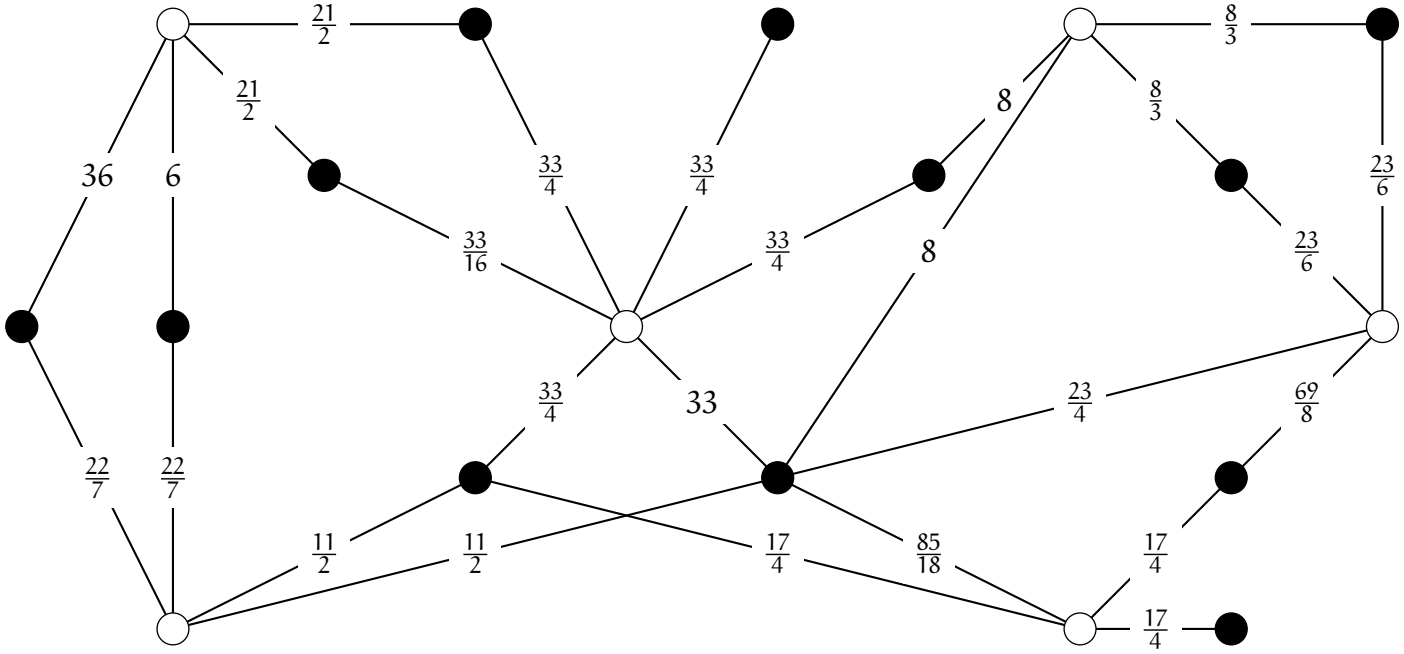

Figure 8: Populated with x = 3

Note that we didn't label the auxiliary edges, because it is clear that auxiliary edges can be chosen arbitrarily to ensure proper conductivities.

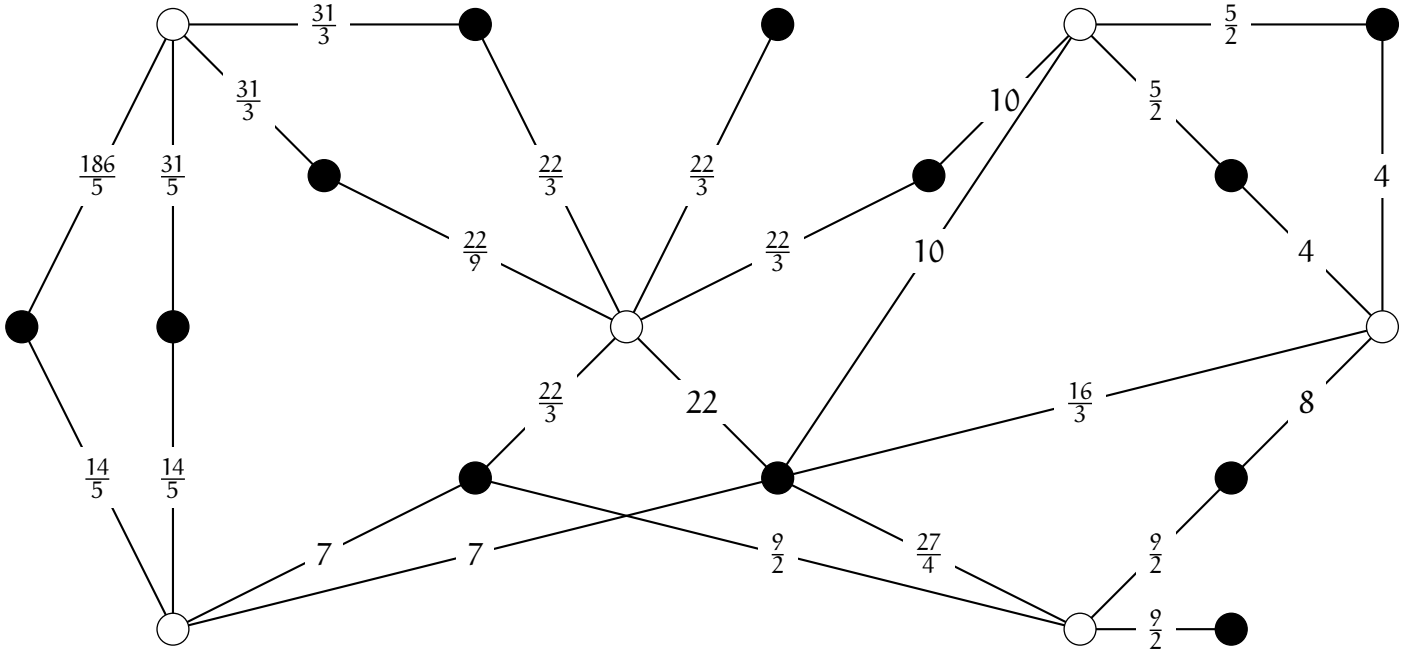

Figure 9: Populated with x = 4

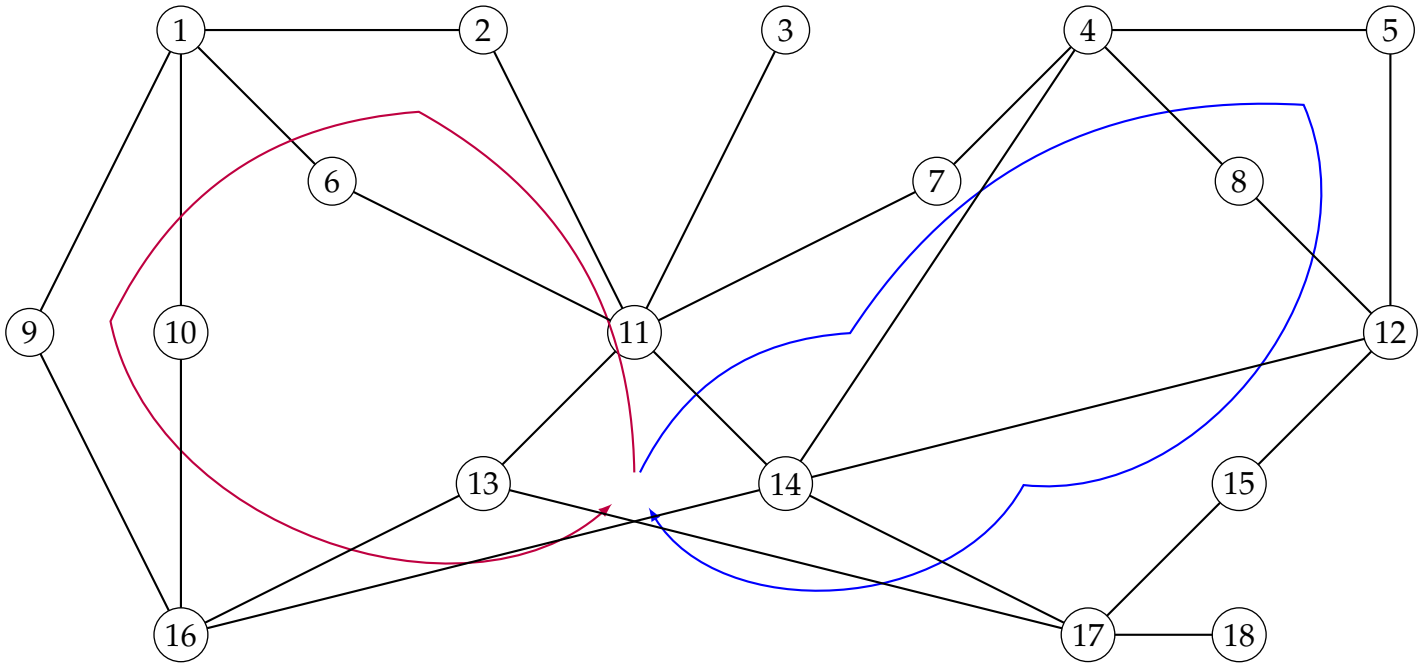

Figure 10: Standard vertex labelling

References

[CIM] E. B. Curtis, D. Ingerman, and J. A. Morrow. Circular planar graphs and resistor networks. *Linear Algebra Appl.*, 283(1-3):115–150, 1998. MR1657214 (99k:05096)

[French] J. French and S. Pan. 2^n to 1 Graphs. *REU 2004.* http://www.math.washington.edu/~reu/papers/2004/jenny/firstpaper.pdf

[Klumb] C. Klumb. Discrete Unsolvability for the Inverse Problem. *Senior Thesis.* https://www.math.washington.edu/~morrow/papers/chad-thesis.pdf

[BSG] A. Levy. Biregular Star Graphs. http://demonstrations.wolfram.com/BiregularStarGraphs/ *Wolfram Demonstrations Project.* Published: August 27, 2014.